

# Mobile distributor

for events, fairs, emergency services, heavy industries, markets and funfairs.



# MOBILE DISTRIBUTOR

## Product information



The new mobile receptacle combinations are available in a variety of assembly fittings. The robust, stackable insulating enclosure are ideally suited for indoor and outdoor use.



### Product details

- Robust, watertight insulating enclosure IP 67, black (RAL 9005)
- Acc. to IEC 61439
- Heat resistant -25 C° up to +40 C°
- Resistant to ageing and weather
- Stackable
- Protection of receptacles and built-in appliances by stable enclosure frame
- Easy handling with integrated handles
- Flexible fitting options up to 125 A
- Protection against condensation in IP 67
- Fitted with receptacles of protection type IP 44 or IP 67
- Fusing behind a transparent cover
- Pre-wired for installation

For customized solutions which are especially made for your application, please contact us!



### CEE receptacles

- 1 CEE 32 A, 5 p, 400 V
- 2 CEE 16 A, 5 p, 400 V

### CEE receptacles

### Receptacles SCHUKO®

- 6 SCHUKO® 16 A, 230 V

### Fusing

- 1 RCD 63 A, 4 p, 0,03 A
- 1 MCB 32 A, 3 p, C
- 2 MCB's 16 A, 3 p, C
- 6 MCB's 16 A, 1 p, C

### Connection

- 2 m H07RN-F5G10 with CEE-plug 63 A, 5 p, 400 V

### Connection and load values

- Pre-fuse max. 63 A
- InA 63 A
- RDF 0,75

### Enclosure size

- 560 x 350 x 340 mm (H x W x D)

### Protection type


- IP 67

### Part no.

- 9500719

# MOBILE DISTRIBUTOR

## Product varieties

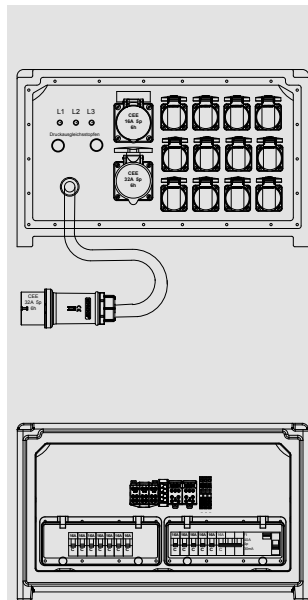

### CEE receptacles

1 CEE 32 A, 5 p, 400 V  
1 CEE 16 A, 5 p, 400 V

### CEE receptacles

12 SCHUKO® 16 A, 230 V

### Fusing

1 RCD 40 A, 4 p, 0,03 A  
1 MCB 16 A, 3 p, C, 10 kA  
12 MCB's 16 A, 1 p, C, 10 kA  
3 Phase control lights green

### Connection

2 m H07RN-F5G6 with  
CEE-plug 32 A, 5 p, 400 V

### Connection and load values

Pre-fuse max. 32 A  
InA 32 A  
RDF 1

### Enclosure size


560 x 350 x 340 mm (H x W x D)

### Protection type

IP 44

### Part no.

**9500722**

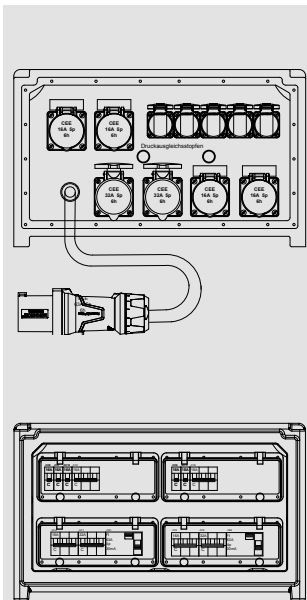

### CEE receptacles

2 CEE 32 A, 5 p, 400 V  
4 CEE 16 A, 5 p, 400 V

### CEE receptacles

5 SCHUKO® 16 A, 230 V

### Fusing

2 RCD's 63 A, 4 p, 0,03 A  
2 MCB's 32 A, 3 p, C  
4 MCB's 16 A, 3 p, C  
5 MCB's 16 A, 1 p, C

### Connection

2 m H07RN-F5G10 with  
CEE-plug 63 A, 5 p, 400 V

### Connection and load values

Pre-fuse max. 63 A  
InA 63 A  
RDF 0,75

### Enclosure size


560 x 350 x 340 mm (H x W x D)

### Protection type

IP 44

### Part no.

**9500706**

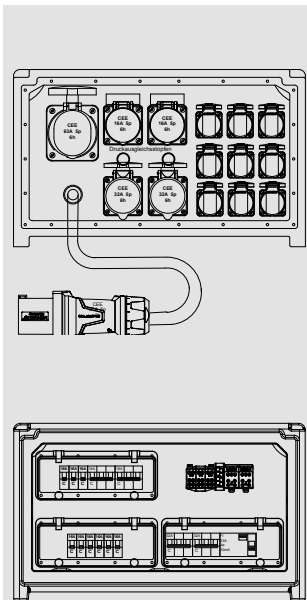

### CEE receptacles

1 CEE 63 A, 5 p, 400 V  
2 CEE 32 A, 5 p, 400 V  
2 CEE 16 A, 5 p, 400 V

### CEE receptacles

9 SCHUKO® 16 A, 230 V

### Fusing

1 RCD 63 A, 4 p, 0,03 A  
2 MCB's 32 A, 3 p, C  
2 MCB's 16 A, 3 p, C  
9 MCB's 16 A, 1 p, C

### Connection

2 m H07RN-F5G10 with  
CEE-plug 63 A, 5 p, 400 V

### Connection and load values

Pre-fuse max. 63 A  
InA 63 A  
RDF 0,6

### Enclosure size


560 x 350 x 340 mm (H x W x D)

### Protection type

IP 44

### Part no.

**9500748**

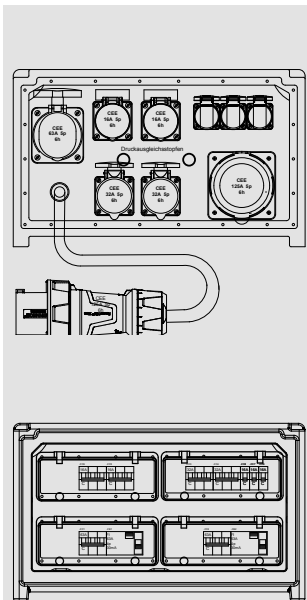

### CEE receptacles

1 CEE 125 A, 5 p, 400 V  
1 CEE 63 A, 5 p, 400 V  
2 CEE 32 A, 5 p, 400 V  
2 CEE 16 A, 5 p, 400 V

### CEE receptacles

3 SCHUKO® 16 A, 230 V

### Fusing

2 RCD's 63 A, 4 p, 0,03 A  
2 MCB's 63 A, 3 p, C  
2 MCB's 32 A, 3 p, C  
2 MCB's 16 A, 3 p, C  
3 MCB's 16 A, 1 p, C

### Connection

2 m H07RN-F5G25 with  
CEE-plug 125 A, 5 p, 400 V

### Connection and load values

Pre-fuse max. 125 A  
InA 125 A  
RDF 0,35

### Enclosure size

560 x 350 x 340 mm (H x W x D)

### Protection type

IP 44

### Part no.

**9500417**





# MENNEKES®

## Plugs for the world

Refer to our brochures and catalogues to keep up to date.

Download the latest versions from our website in practical PDF format or request print copies by phone or E-Mail.



### **AMAXX®**

Receptacle combinations.  
Product varieties.



### **AMAXX® your Industry**

For worldwide use.



### **AMAXX® your Industry**

Solutions for Industry 4.0.



### **MENNEKES catalogue**

### **MENNEKES**

Elektrotechnik GmbH & Co. KG  
Industrial plugs and sockets

Aloys-Mennekes-Str. 1  
57399 Kirchhundem  
GERMANY

Tel.: +49(0) 27 23 / 41-1  
Fax: +49(0) 27 23 / 41-2 14  
E-Mail: [info@MENNEKES.de](mailto:info@MENNEKES.de)

**[www.MENNEKES.com](http://www.MENNEKES.com)**

You can also find us:

